

AEGIS SuperLED White Light Illuminator

www.boschsecurity.com



BOSCH
Invented for life



AEGIS illuminators feature Constant Light technology, which automatically controls and adjusts light output to compensate for LED degradation and temperature changes. LED degradation results in poor light output, reduced image quality, and reduced illumination range. The Constant Light patent-pending technology maintains a constant level of light throughout the life of the illuminator, thus overcoming this performance-related issue identified by security consultants, installers, and end users alike.

3D Diffuser technology micro-refractive lens technology enables increased surveillance range, wider beam patterns, and evenly illuminated nighttime surveillance images. Specifically designed for energy efficient operation, AEGIS can be powered directly from any 12 to 24 VDC or 24 VAC supply for faster, flexible, cost effective installations.

Functions

- 3D diffuser technology eliminates hotspots in the foreground and underexposed backgrounds
- Delivers even illumination designed specifically for CCTV
- Dramatically improves night-time imaging, reducing noise and increasing video signal

- ▶ Constant Light technology ensures consistent illumination
- ▶ 3D diffuser technology delivers the even illumination required by CCTV
- ▶ Enables optimum nighttime color performance
- ▶ Enhances video analytics performance
- ▶ Reduced power consumption for a greener, more environmentally friendly solution with lower operating costs

- When used with encoding and digital recording systems, even illumination reduces bit rate and so lowers storage requirements

Controlled by Constant Light Technology

- Maintains a constant level of lighting performance for the life of the illuminator
- Maintains a constant level of lighting performance when operated at varying ambient temperatures

Installer friendly installation features


- Low voltage input to the illuminator for safe installation
- Illuminator link port allows one illuminator to switch all others in a master/slave configuration
- Dual-mode camera port allows color/mono control from or to the camera
- Easy connection using dedicated cables

High Efficiency Surface Mount LEDs

- Industry-leading thermal management and super high-efficient LEDs deliver maximum illumination

Installation/configuration notes

Dimensions

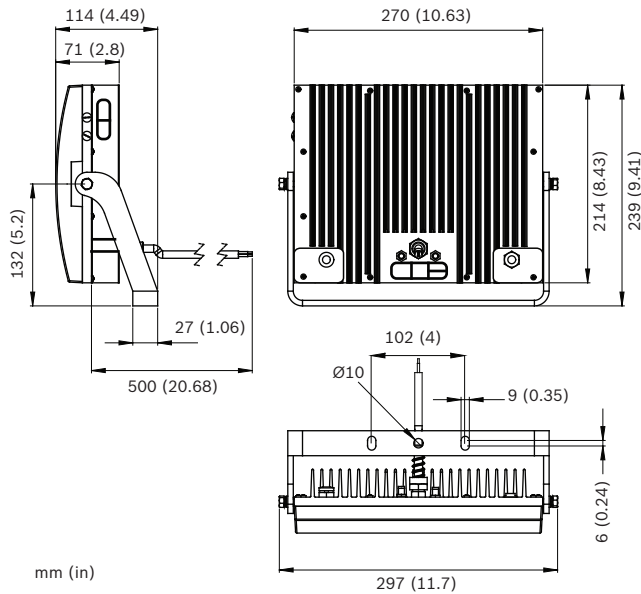

Technical specifications

AEGIS SuperLED Infrared

Color	Black anodized heat sink, white front fascia with clear window
LEDs	High efficiency surface mounted LED array with current-limited integral power circuit
Color temperature	4200 K
Beam Patterns	10°, 20°, 30°, 60°, 95°, 120°
Consumption	50–90 W (90 W max power)
Input Voltage	12 to 24 VDC or 24 VAC, 50/60 Hz
Temperature Range	–40°C to +50°C (–40°F to 122°F) max. on full power
Environmental	IP67
Construction	Robust, aluminum construction with acrylic front fascia
Weight	3.8 kg (8.4 lb)
Dimensions	305 x 240 x 110 mm (11.9 x 9.4 x 4.4 in)
Power Cable	4 m (13 ft)
Bracket	Wall mount U-bracket supplied

AEGIS SuperLED White Light Performance Ranges

Model	Wavelength	Beam Patterns	Achievable Distance*	HFOV
SLED10-WBD	White light	10°	85 m (275 ft)	15 m (50 ft)

SLED20-WBD	White light	20°	55 m (180 ft)	20 m (65 ft)
SLED30-WBD	White light	30°	50 m (165 ft)	25 m (85 ft)
SLED60-WBD	White light	60°	35 m (115 ft)	40 m (130 ft)
SLED95-WBD	White light	95°	25 m (85 ft)	55 m (180 ft)
SLED120-WBD	White light	120°	20 m (65 ft)	70 m (230 ft)

* Actual illumination distance achieved is dependent on camera and lens characteristics.

Ordering information

SuperLED Black Diamond (White-10) EX PSU
Order number **SLED10-WBD**

SuperLED Black Diamond (White-20) EX PSU
Order number **SLED20-WBD**

SuperLED Black Diamond (White-30) EX PSU
Order number **SLED30-WBD**

SuperLED Black Diamond (White-60) EX PSU
Order number **SLED60-WBD**

SuperLED Black Diamond (White-95) EX PSU
Order number **SLED95-WBD**

SuperLED Black Diamond (White-120) EX PSU
Order number **SLED120-WBD**

Accessories

PSU-224-DC100 Universal Power Supply
Universal Power Supply 2x24 VDC
Order number **PSU-224-DC100**

UFLED-CL-1M Link Cable
1 m (3.3 ft) telemetry link cable for Aegis illuminators
Order number **UFLED-CL-1M**

UFLED-CI-5M Switching Cable
5 m (16.4 ft) remote telemetry or day/night switching cable for Aegis illuminators
Order number **UFLED-CI-5M**

Represented by:

Americas:

Bosch Security Systems, Inc.
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
security.sales@us.bosch.com
www.boschsecurity.us

Europe, Middle East, Africa:

Bosch Security Systems B.V.
P.O. Box 80002
5617 BA Eindhoven, The Netherlands
Phone: + 31 40 2577 284
Fax: +31 40 2577 330
emea.securitysystems@bosch.com
www.boschsecurity.com

Asia-Pacific:

Robert Bosch (SEA) Pte Ltd, Security
Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia

China:

Bosch (Shanghai) Security Systems Ltd.
201 Building, No. 333 Fuquan Road
North IBP
Changning District, Shanghai
200335 China
Phone +86 21 22181111
Fax: +86 21 22182398
www.boschsecurity.com.cn

America Latina:

Robert Bosch Ltda Security Systems Division
Via Anhanguera, Km 98
CEP 13065-900
Campinas, Sao Paulo, Brazil
Phone: +55 19 2103 2860
Fax: +55 19 2103 2862
latam.boschsecurity@bosch.com
www.boschsecurity.com